

# Bases for GS-mark tests of IT Equipment in Combination with Visual Display Units\*

(2023-01-01)

The processing of test principles for the evaluation of visual display units occurred initially in Germany under management of the Administrative Legal Accident Insurance. With the reorganization of the Experience Exchange of GS Test Organizations, Exchange of Experience Forum 1 (EK1) assumed this task in 1998.

With the progress of European standardization, and with increasing experience in the assessment of IT equipment in combination with visual display units, the test principles are being maintained up to date.

New display techniques, as PDA's, micro displays and beamers can be included. Therefore, the test principles were provided with a new number, complemented with the date of the current state of the discussions as a permanent document.

These test principles comprise the requirements that are prerequisites for the safe and ergonomic design of the equipment. In addition, there are requirements for placing on the market, for the workplace and the workplace environment, which are to be considered by the user or operator, and therefore, are not subject to these test principles. Beyond these test principles further requirements exist like laws and directives and others.

These test principles are to be used in the current version at the time of the investigation. Certificates that refer to earlier versions of this document remain basically valid within the frame of the usual period of validity of a GS Certificate, unless EK1 decides in exceptional cases due to urgent necessities differently.

*Disclaimer: This is a translation from the German original version to English. In the case of any inconsistencies the German version is valid!*

\*) Visual display units within the meaning of the Workplace Regulations.

## A.1 General Principles

### A.1.1 Guidelines and Laws

#### **2014/35/EU**

Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits

#### **2014/30/EU**

Directive 2014/30/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to electromagnetic compatibility (recast) Text with EEA relevance

#### **90/270/EWG**

Council Directive of 29 May 1990 on the minimum requirements concerning the safety and health protection during work on visual display units (Individual Directive in the context of Article 16, Clause 1 of Directive 89/391/EEC), implemented in Germany by the Workplace Regulations [ArbStättV]

#### **2001/95/EG**

Directive of the European Parliament and of the Council of 3. December 2001 on general product safety.

#### **German Product Safety law – ProdSG**

Law on the provision of products on the market, published in the Federal Law Gazette 2021-07-30

Electromagnetic Compatibility of Equipment Act (**EMVG**), 26.02.2008

Workplace Regulations (Workplace Regulations - ArbStättV)

The contents of the Bildschirmarbeitsverordnung (BildscharbV) were largely included in the Workplace Regulations.

Ordinance on the protection against injury by X-ray radiation (**X-ray Ordinance - RöV**), 08 January 1987 version.

#### **2014/53/EU**

Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.



**A.2.6 Safety concerning noise**

DIN EN ISO 7779	Acoustics; measurement of airborne noise emitted by information technology and telecommunications equipment
DIN EN 29295	Acoustics; measurement of high-frequency noise emitted by computer and business equipment (ISO 9295:1989); German version EN 29295:1991
ISO 9296	Acoustics; declared noise emission values of computer and business equipment
DIN EN 50332-1	Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for "one package equipment";
DIN EN 50332-2	Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Matching of sets with headphones if either or both are offered separately.

**A.2.7 Labelling and Information in Instructions for Use**

ISO/IEC Guide 37	Instructions for use of products of consumer interest
DIN EN IEC/IEEE 82079-1	Preparation of information for use (instruction for use) of products – Part 1: Principles and general requirements

**A.2.8 Ergonomic design**

For testing of the ergonomic design of a product in particular apply:

DIN 2137-1	Keyboards for data and text input – Part 1: German keyboard layout
DIN 2137-2	Keyboards for data and text input – Part 2: Additional requirements;
DIN EN ISO 9241-1	Ergonomic requirements for office work with visual display terminals (VDTs) - Part 1: General introduction (ISO 9241-1:1997); German version EN ISO 9241-1:1997
DIN EN 29241-2	Ergonomic requirements for office work with visual display terminals (VDTs); part 2: guidance on task requirements
DIN EN ISO 9241-6	Ergonomic requirements for office work with visual display terminals (VDTs) - Part 6: Guidance on the work environment

DIN EN 60068-2-70	Environmental testing - Part 2: Tests - Test Xb: Abrasion of marking and letterings caused by rubbing of fingers and hands
DIN EN ISO 9241-3xx (xx means 00-07)	Ergonomic requirements for visual displays
DIN EN ISO 9241-4xx (xx means 00-20)	Ergonomic requirements for physical input devices
ISO/IEC 9995-1	Information technology - Keyboard layouts for text and office systems - Part 1: General principles governing keyboard layouts
ISO/IEC 9995-2	Information technology - Keyboard layouts for text and office systems - Part 2: Alphanumeric section
ISO/IEC 9995-3	Information technology - Keyboard layouts for text and office systems - Part 3: Complementary layouts of the alphanumeric zone of the alphanumeric section
ISO/IEC 9995-4	Information technology - Keyboard layouts for text and office systems - Part 4: Numeric section
ISO/IEC 9995-5	Information technology - Keyboard layouts for text and office systems - Part 5: Editing section and Function section
ISO/IEC 9995-7	Information technology - Keyboard layouts for text and office systems - Part 7: Symbols used to represent functions
ISO/IEC 9995-8	Information technology - Keyboard layouts for text and office systems - Part 8: Allocation of letters to the keys of a numeric keypad

**A2.9 Further decisions from meetings of the Exchange of Experience Forum 1 (EK1) and its Working Group AG1****A.2.9.1 Keyboards (1<sup>st</sup> meeting AG1 EK1):**

If the key board does not comply with the above mentioned standards, decisions must be made for special groups of users.

**A.2.9.2 Keyboard caps, labelling of the front side (4<sup>th</sup> meeting AG1 EK1):**

In principle the same requirements apply as for labelling of the topside.

**A.2.9.3 Notebooks, keyboard height (4<sup>th</sup> meeting AG1 EK1):**

Cancelled - 12<sup>th</sup> meeting AG1 EK1

**A.2.9.4 Gloss of keyboard and housing (4<sup>th</sup> meeting AG1 EK1):**

The evaluation of the contrast and the gloss of keyboards and housings are to be made with consideration of the manufacturer's specification for the intended use. If no other life cycle is indicated by the manufacturer or specifications are made by standards, the values on key caps are to be judged after 5 million cycles.

**A.2.9.5 Specification for antireflection coating of monitors (4<sup>th</sup> meeting AG1 EK1):**

The maximum intended illuminance or targeted application is to be indicated on the certificate.

**A.2.9.6 Specification for noise in certificates (5<sup>th</sup> meeting AG1 EK1):**

For the orientation of the operator the declared sound power level ( $L_{WA,d}$ ) are to be indicated on the certificate for operation in standby and full performance mode, according to ISO 9296 (DIN EN ISO 7779) and DIN EN ISO 29295.

**A.2.9.7 Keying feedback (5<sup>th</sup> and 6<sup>th</sup> meeting AG1 EK1):**

Actuation of a key shall be accompanied by a feedback. The feedback can be kinaesthetic (key displacement with snap function) or not kinaesthetically (key displacement with ramp function) accompanied by an auditory feedback. The auditory feedback can take place in terms of hardware solution (e.g. by a loud-speaker integrated in the keyboard) or by software solutions (e.g. as part of the operating system). The today generally used kinaesthetic feedback is sufficient, not however an end-impact noise (see DIN EN ISO 9241-410).

**A.2.9.8 Segmented keyboards (4<sup>th</sup> meeting EK1):**

Cancelled – replaced by A.2.9.13

**A.2.9.9 Video graphic boards (3<sup>rd</sup> meeting EK1):**

Video graphic boards (internal and external) are not qualified for a GS-Mark.

**A.2.9.10 Keyboards, abrasion test (7<sup>th</sup> meeting AG1 EK1):**

The abrasion test with synthetic sweat (e.g. according DIN EN ISO 105-E04:2013) in its present form is confirmed.

**A.2.9.11 Keyboards, DIN 60068-2-70 (7<sup>th</sup> meeting AG1 EK1):**

Applicable for testing are DIN EN ISO 9241 part 410 in combination with DIN 60068-2-70 (in that order). The abrasion test shall be performed with the force of  $1,5 \text{ N} \pm 20\%$  as defined in DIN EN ISO 9241 part 410 for an applied force for key displacement and not with the values given by DIN EN 60068-2-70.

**A.2.9.12 Keyboards, laser inscription (7<sup>th</sup> meeting AG1 EK1):**

The durability of legends with laser inscription has to be proofed with the test procedures as intended in DIN EN ISO 9241 part 4. If a test confirms that the durability of legends for a specific, qualified laser inscription procedure and clearly specified materials is given, specific tests could be skipped.

**A.2.9.13 Segmented keyboards (8<sup>th</sup> meeting AG1 EK1):**

All participants agree, due to insufficient definition of test requirements, not to accept test orders for such keyboards. Segmented keyboards with adjustable angle have to be tested in normal position according to DIN EN ISO 9241-4xx and DIN 2137.

**A.2.9.14** No longer considered.

**A.2.9.15 Keyboard layout, Notebook keyboards (9<sup>th</sup> + 12<sup>th</sup> meeting AG1 EK1):**

The layout must be suitable for the intended user group. The tests are performed in accordance with DIN 2137.

**A.2.9.16 Deviations from test basis**

In case of deviations from test basis EK1-ITB 2000 the following procedure apply:

1. Preparation of a test report. The test report shows the deviation from the test basis.
2. Proof of necessity of the deviation.
3. Presentation of the results within the working group (EK 1-AG1)

Alternative test method for keyboards (addition):

4. Performing of an user test concerning the acceptance of deviations by a qualified laboratory according to DIN EN ISO 9241-4xx and DIN EN ISO 9241-11
5. Presentation of the results within the working group (EK 1-AG1)

**A.2.9.17** No longer considered.

**A.2.9.18 Evaluation of gloss of housing**


The requirements for gloss of housing are valid for all surfaces except of the foot-print.

Company logos are excluded during gloss evaluation.

Functional units within the housing (e.g., camera with glass cover) are excluded from the gloss evaluation for the areas where it is necessary for the function (e.g. camera lens).

Interfaces are excluded during gloss evaluation.

The following figure shows examples of gloss evaluation for interfaces.

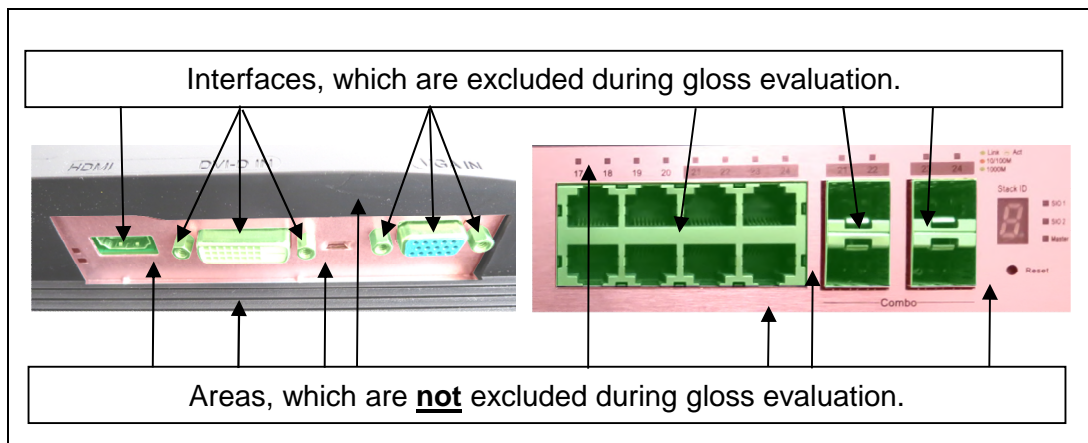

**A.2.9.19 GS test with restricted function / scope**

For GS tests of IT equipment used within a restricted scope (like home area, entertainment, toys etc.) or function (like short text input) the test has to follow the test principles EK1-ITB 2000. Deviations and their necessity shall be reported within the test report.

When deviating from the application of the ergonomic requirements of these test principles in the context of a device evaluation, the following guidelines have to be considered:

- intended functions of the considered product
- range of application provided by the manufacturer
- expected average duration of use of displays and controls

The present test principles always have to be applied if at least one of the above guidelines impair the user's safety significantly.

**A.2.9.20** No longer considered.

**A.2.9.21** No longer considered.

**A.2.9.22** No longer considered.



**A.2.9.23 Graphic boards (11<sup>th</sup> and 26<sup>th</sup> meeting AG1 EK1):**

If a graphic board offers an analogue and/or digital output following requirements of ISO 9241-307 have to be evaluated:

- Display luminance
- Gamma
- Flicker
- Moire artifacts, respectively other visual artifacts

**A.2.9.24 Classic typewriters (11<sup>th</sup> meeting AG1 EK1):**

DIN 2137 have to be applied for electronic typewriters.

**A.2.9.25 Server (12<sup>th</sup> meeting AG1 EK1):**

The test of server according annex 1 “Ergonomic basis for GS test of IT equipment in combination with visual display units EK1-ITB 2000)“ is effected to the following criteria:

<b>Set-up Location of the server</b>	<b>Decision criteria</b>	<b>GS-Ergonomics- test</b>
within a server room	without graphic board	Sound power level
	with graphic board	EK1-ITB 2000 (A.2.9.23) Sound power level Gloss evaluation
within a server room	with graphic board. The manufacturer declares that the set-up of the server is made in the server room only and shall not be in the field of vision of the user *)	EK1-ITB 2000 (A.2.9.23) Sound power level
outside a server room	to account as a PC (System unit), or as a device if the requirements of A.2.9.31 apply	EK1 ITB 2000

Remark:

Input and output devices (such as monitors and keyboards) are not covered by A.2.9.25.

\*) Scope: Declaration of the manufacturer given in the brochure and in the User’s Manual:

The product is not suitable for use at visual display workplaces according to §2 of the Workplace Regulations.

Statements on the GS certificate:

- ◆ Test specification
- ◆ Hint that the tested product is not suitable for use at visual display workplaces.

**A.2.9.26 Mobile devices having a size  $\geq$  DIN A5 (diagonal approx. 25.5 cm, 10 inch) with display (12<sup>th</sup> meeting AG1 EK1):**

For mobile devices having a size  $\geq$  DIN A5 the corresponding test principles have to be applied.

The minimum character size of 2.6 mm for key legends is applicable to characters only. Symbols like +, -, ; are excluded.

**Mobile devices having a size  $<$  DIN A5 (diagonal approx. 25.5 cm, 10 inch) with display (28<sup>th</sup> meeting AG1 EK1)**

The GS certification is not possible.

**A.2.9.27 User's Manual (12<sup>th</sup> meeting AG1 EK1):**

Safety relevant instructions of the User's Manual have to be delivered in paper format. It is not sufficient to store these instructions on a hard disk or a CD-ROM.

**A.2.9.28** repealed (17<sup>th</sup> meeting AG1 EK1 decision **A.2.9.33**)**A.2.9.29 Flat panel displays (13<sup>th</sup> meeting AG1 EK1):**

The requirement of the inclination in front of the screen has not to be applied for flat panel displays.

**A.2.9.30 Data to be supplied in GS certificates (14<sup>th</sup> meeting AG1 EK1):**

For clear and uniform presentation of information a minimum data are required in GS certificates for IT products (see appendix 6).

**A.2.9.31 Gloss evaluation of devices outside the field of view (15<sup>th</sup> and 22<sup>th</sup> meeting AG1 EK1):**

The requirements for the gloss of housing according A.2.9.18 apply to devices used at the visual display workplace according to ArbStättV. Devices intended for use outside the visual display workplace can receive a GS-Mark if the scope is indicated in the User's Manual as well as the certificate. That means the following wording is possible in situations where the use within the field of view is not intended and where sufficient hints are given in the User's Manual for the avoidance of such situations to ensure that display work is not affected.

Wording in the certificate: "This device is not intended for use in the direct field of view at visual display workplaces. To avoid incommoding reflexions at visual display workplaces this device must not be placed in the direct field of view."

Note:

(direct) field of view see ISO 8995, ISO 11064-4, EN 842, DIN 5340

**A.2.9.32 Reflections with „Bright View Notebooks” (16<sup>th</sup> meeting AG1 EK1):**

The GS certification for notebooks is possible, if EK1-ITB 2000 and ISO 9241-3xx are fulfilled. In addition pay attention to the following:

- Two test engineers have to evaluate the display surface by subjective and visual inspection. Aim of this test is to assess disturbing reflections in the intended context of use.

According to ISO 9241-307 the reflection classes have to be replaced by luminance and maximum illuminance values from ISO 9241-307:

- If disturbing reflections are detected in case of  $L_{REF,EXT} = 200 \text{ cd/m}^2$  and/or  $L_{REF,SML} = 2000 \text{ cd/m}^2$  the intended context of use has to be described in more detail within the safety instructions. A hint that the use in bright environments is restricted, e.g. during mobile use, must be given in the safety instructions as well as the GS certificate.

The statement depends on the intended context of use. Example:

"During mobile use with disadvantageous illumination conditions (e.g. direct sun light) reflections may occur which result in reduced readability".

**A.2.9.33 Keyboard (17<sup>th</sup> meeting AG1 EK1)**

A reduction of the key strokes for keyboards made of PBT material with laser inscription processes from 5 million to 2 million is possible if, after 2 million strokes a minimum contrast of 3,3:1 is achieved and the gloss level is under 20 gloss units.

A reduction of the key strokes for keyboards with laser inscription processes from 5 million to 4 million is possible if, after 4 million strokes a minimum contrast of 3,3:1 is achieved and the gloss level is under 20 gloss units.

The resolution A.2.9.28 is herewith nullified.

Note: The gloss level of key caps can be determined alternatively with gloss level plates (maximum matt or semi matt).

Hint: gloss templates/gloss level plates are available from Institut für Lackprüfung, Felsweg 19, 35435, Wettenberg, Germany.

**A.2.9.34 Application of DIN EN 50332-1/-2 (18<sup>th</sup>, 19<sup>th</sup> and 28<sup>th</sup> meeting AG1 EK1)**

The requirements of EN 50332 for limitations of the sound pressure level of ear-/headphone outputs is expanded to include stationary products with ear-/headphone outputs because they are subject to the same dangers regarding hearing damage/hearing loss. The following items have to be considered:

**1. Measurement procedure**

Test a) has to be performed generally. For supplied ear-/headphones additionally test b is performed.

## a) Electric test

In deviation to EN 50332 a measurement of the output voltage with adjustment of the volume control to center position has to be made with and without equalizer. During the measurements the equalizer is adjusted to its neutral or center position (factory setting). In case the reading is  $\leq 150$  mV the instructions for use must consider a warning note to fulfill the requirements according to EK1-ITB 2000. In case the reading is  $> 150$  mV the requirements according to EK1-ITB 2000 are not fulfilled.

## b) Acoustic test

In case of a system (IT device with an ear-/headphone) the type of the ear-/headphone (manufacturer and model/type) has to be specified in the instructions for use. The requirements according to EN 50332-1 have to be fulfilled. In deviation to EN 50332-1 the measurements shall be conducted with adjustment of the volume control to center position with and without equalizer. The instructions for use must contain a warning note.

Informative: A measurement of the output voltage with adjustment of the volume control and equalizer to maximum has to be carried out.

## 2. Warning note (example)

“Excessive sound pressure from ear-/headphones can cause hearing damage /hearing loss.

Adjustment of the volume control as well as the equalizer to other settings than the center position may increase the ear-/headphones output voltage and therefore the sound pressure level.

The use of factors influencing the ear-/headphones output other than those specified by the manufacturer (e.g. operating system, equalizer software, firmware, driver) may increase the ear-/headphones output voltage and therefore the sound pressure level.”

The use of ear-/headphones other than those specified by the manufacturer may lead to heightened sound pressure level.

3. Exemption with portable devices (Addendum 28<sup>th</sup> meeting AG1 EK1)

For portable music player the existing requirements (EN 62368-1) have to be considered

**A.2.9.35 Electronics scales with LCD indicators (18<sup>th</sup> meeting AG1 EK1)**

The requirements for electronic scales with LCD indicators for the use in weighing work stations are to adhere to Annex 7.

Note: Products limited to one indicator line only are exempted.

**A.2.9.36** No longer considered.

**A.2.9.37 Critical temperatures of hot surfaces likely to be touched  
(22<sup>nd</sup> meeting AG1 Ek1)**

The following products with critical surface temperatures were identified and must be considered separately during testing:

- Bottom side of a laptop
- Head-/Earphone
- Handheld Scanner

If the surface temperatures of CENELEC Guide 29 are exceeded a warning and safety note must be given in the instructions for use to address proper use and to exclude contact with surfaces of high surface temperatures.

Keyboards are not considered in CENELEC Guide 29.

**A.2.9.38 Mounts and stands for monitors (33<sup>rd</sup> meeting AG1 EK1)**

In addition to the requirements of the harmonized standards mounts and stands must be evaluated regarding to tilt and gloss (if in the field of vision).

**A.2.9.39 Monitors without stand (33<sup>rd</sup> meeting AG1 EK1)**

Generally monitors without stand are able to get GS mark.

The intended use of the device specified by the manufacturer must be taken into account in the evaluation. Requirements for mounts and stands (see A.2.9.38) must be specified in the product documentation.

**A.3 Contents of the Test documentation**

- product description
- intended context of use
- Test report according to DIN EN ISO/IEC 17025
- Specifications for sound emission values according to Annex 1

**Annex 1:** Tabular compilation of the ergonomic bases for the GS testing of IT devices in combination with visual display units.

**Annex 2:** Cancelled - 38th meeting AG1 EK1

**Annex 3:** Cancelled - 12<sup>th</sup> meeting AG1 EK1

**Annex 4:** Requirements for flat panels for the GS-mark (Interpretation of ISO 9241-3xx)

**Annex 5:** Requirements for mobile devices < DIN A4

**Annex 6:** Specifications in a GS Certificate

**Annex 7:** Requirements for other devices

Annex 1: Basis for GS Test of IT Equipment in Combination with Visual Display Units (EK1-ITB 2000)

Requirement	Standard / Reference	Visual Display/ Projector	PC (System unit)	Keyboard	Non-keyboard input devices	Mobile device (Notebook, Tablet, Slate...)	Other devices (e.g. printer scanner, server, scales)
1 Image quality	DIN EN ISO 9241-3xx	X	X			X	X <sup>10)</sup>
2 Input requirements	DIN EN ISO 9241-410 <sup>13)</sup> DIN 2137			X X <sup>2)</sup>	X	X <sup>3) 8)</sup> X <sup>2) 8)</sup>	X <sup>4) 10)</sup>
3 Sound power level L <sub>WAd</sub> (Operation according to manufacturer)	DIN EN ISO 7779 (ISO 9296) ArbStättV, annex 3.7	X <sup>1)</sup>	X <sup>1)</sup>		X <sup>1)</sup>	X <sup>1)</sup>	X <sup>1) 11)</sup>
4 Tilt angle max. forward: Tilt angle min. backward:	ArbStättV, annex 6.3	5° <sup>6)</sup> ≥ 5°		X <sup>7)</sup>		≥ 5° <sup>9)</sup>	
5 Swivel (rotation)	ArbStättV, annex 6.3	X					
6 Max. force to swivel	ArbStättV, annex 6.3	max. 100 N					
7 Brightness adjustable	ArbStättV, annex 6.2	X				X	X <sup>10)</sup>
8 Contrast adjustable	ArbStättV, annex 6.2	X <sup>4)</sup>				X <sup>4)</sup>	X <sup>4)</sup>
9 Gloss of housing	ArbStättV, annex 6.1 and annex 6.3 DIN EN ISO 9241-3xx	≤ 20 gloss units	≤ 20 gloss units <sup>12)</sup>	≤ 20 gloss units	≤ 20 gloss units	≤ 20 gloss units	≤ 20 gloss units <sup>11) 12)</sup>
10 Headphone output	DIN EN 50332	X <sup>5)</sup>	X <sup>5)</sup>	X <sup>5)</sup>		X <sup>5)</sup>	X <sup>5)</sup>
11 Technical documentation	ProdSG	X	X	X	X	X	X
12 User's manual	ProdSG	X	X	X	X	X <sup>8)</sup>	X

**Remark:**

Requirements marked with **X** have to be proved.

1) With noise emitting parts (except keyboards, due to a lack of comparable measurement method).

A plausibility check of the manufacturer data is necessary:  
The test and the test report of the manufacturer containing the noise emission values have to be in accordance to the formal requirements of DIN EN ISO/IEC 17025.

2) With German layout, only keyboard layout T1 or E1

3) Apply DIN EN ISO 9241-410 excluding exceptions given in DIN 2137-2.

4) If technically provided.

5) if available (see A2.9.34)

6) only for CRT-VDU's

7) A mechanism for tilt shall be available, the maximum tilt is 15°.

8) mobile devices < DIN A4: see Annex 5

9) mobile devices < DIN A4: not applicable

10) see Annex 7

11) for server see A.2.9.25

12) see A.2.9.31

13) excluded noise emission

ArbStättV = Workplace Ordinance, based on European Council Directive 89/654/EEC and 92/58/EEC, ProdSG = German Product Safety law

**Annex 2: Test procedure for character height: Example for 17" CRT - VDU**

Cancelled - 38<sup>th</sup> meeting AG1 EK1

**Annex 3: Requirements for notebook keyboards**

Cancelled - 12<sup>th</sup> meeting AG1 EK1

**Annex 4: Ergonomic Requirements for flat panels for GS-mark**

Determination of the intended context of use according to *ISO 9241-307, (example)*

Element	Attribut	Quantification
User	Vision	User with normal or to normal corrected vision of any age, 7 years or older (any literate user).
Environ ment	Design screen illuminance, $E_S$	Vertical $250\text{ lx} + 250\text{ lx} \times \cos(\alpha)$ in offices, where $\alpha$ is the screen tilt angle. The screen tilt angle is considered to be $75^\circ$ .
	Typical components of the illumination: Large aperture source ( $15^\circ$ ) and small aperture source ( $1^\circ$ ) illumination	<ol style="list-style-type: none"> <li><math>L_{REF,EXT} = 200\text{ cd/m}^2</math> and <math>L_{REF,SML} = 2\,000\text{ cd/m}^2</math> (suitable for general office use);</li> <li><math>L_{REF,EXT} = 200\text{ cd/m}^2</math> or <math>L_{REF,SML} = 2\,000\text{ cd/m}^2</math> (suitable for most, but not all, office environments);</li> <li><math>L_{REF,EXT} = 125\text{ cd/m}^2</math> or <math>L_{REF,SML} = 200\text{ cd/m}^2</math> (requires a specially controlled luminous environment).</li> </ol> <p>Dabei ist:  <math>L_{REF,EXT}</math> is the luminance of the large aperture source (<math>15^\circ</math>) and  <math>L_{REF,SML}</math> is the luminance of the small aperture source (<math>1^\circ</math>).</p>
	Illuminant	CIE illuminant D65
	Ambient temperature	ambient temperature of approximate $15^\circ\text{C}$ to $35^\circ\text{C}$ is considered.
Task	Content and perception	Artificial information
	Amount of information	Preferred screen size for sufficient amount of information with appropriate object size and resolution.
	Image type	Still image, quasi-static or moving image is considered, if not otherwise specified by the supplier.
	Design viewing distance, $D_{design,view}$	500 mm
	Design viewing direction, $\theta_D, \phi_D$	Within a specific range of angles from the normal.
	Design viewing direction range (angle of inclination and azimuth)	<p>Viewing cone with a single visual display</p> <p>The maximum inclination angle range <math>\theta_{range}</math> is:  <math>\theta_{range} = 2 \times \arctan(D_{active}/2 \times D_{design,view})</math>. Where  <math>D_{active}</math> is the diagonal of the active display area and  <math>D_{design,view}</math> is the design viewing distance.</p> <p>The design inclination angle is within <math>0^\circ \leq \theta_D \leq 40^\circ - \theta_{range}/2</math>. The azimuth angle <math>\phi</math> is <math>0^\circ</math> bis <math>360^\circ</math>.</p> <p>NOTE This definition correspond to viewing direction range class <math>Class_{viewing}</math> III of earlier ISO 13406-2.</p>
	Eye and head position	From fixed to moving.
	Number of users	Typical single or multiple.
Usage	Display handling	For this compliance route stationary display handling is considered, if not otherwise specified by the supplier.



**Annex 5: Ergonomic Requirements for mobile devices (AG1 of EK1, 70-02)**

**1. Definition: Mobile device < DIN A4**

PC with integrated Display, which is smaller than DIN A4 (diagonal approx. 35,6 cm, 14 inch, 12<sup>th</sup> meeting AG1 EK1) and bigger than DIN A5 (diagonal approx. 25.5 cm, 10 inch, 25<sup>th</sup> meeting AG1 EK1) and is not used for steady work of visual display tasks.

**2. Use of mobile devices**

In general mobile devices are hold by hand or standy-situated on a table.

**3. Keyboard of mobile devices < DIN A4 (ISO 9241-410, ISO/IEC 9995):**

<b>ISO 9241-410</b>	
Clause	Applicability/Limitation
B.2.3.1 m) Palm-rests	N/A
B.2.2.2.1 Sections of the keyboard	N/A
B.2.3.1 b) Home row height	N/A
B.2.3.1 d) Slope of the keyboard	applicable
B.2.3.1 e) Profile of keyboard	applicable
B.2.3.1 f) Keyboard surfaces and material properties of keyboards	applicable
B.2.1.3 Keyboard placement	N/A
B.2.3.1 l) Keyboard slope adjustment mechanism	N/A
B.2.3.1 a) Key layout and centre-line spacing	N/A
B.2.2.1.1 b) Keytop design	minimum 64 mm <sup>2</sup>
B.2.2.1.1 c) Displacement	applicable
B.2.2.1.1 e) Force/ displacement characteristics	applicable
B.2.2.1.1 f) Feedback	applicable
B.2.2.1.1 f) Kinaesthetic feedback	N/A
B.2.2.1.1 f) Auditory feedback	N/A
B.2.2.1.1 f) Visual feedback	applicable
B.2.2.1.1 g) Rebound action (bounce)	applicable
B.2.2.1.1 i) Key roll-over	applicable
B.2.2.1.1 h) Key repeat function	applicable (Software)
B.2.2.1.1 k) Graphical symbols	N/A
B.2.2.1.1 j) Geometric design of key legends	applicable
B.2.2.1.1 l) Number and positioning of legends	N/A
B.2.2.1.1 m) Durability of legends	applicable
B.2.3.1 h) Cursor keys and keys in the editing section	applicable
B.2.3.1 g) Numeric keypad	applicable if present
B.2.2.1.1 a) Keytop shape	applicable

ISO/IEC 9995-1		
Clause		Applicability/Limitation
7.4	Key location numbering requirements	applicable
8.1	Group positions	applicable
8.2	Level positions within one group	applicable

ISO/IEC 9995-2		
Clause		Applicability/Limitation
7	Arrangement and location of keys in the alphanumeric zone of the alphanumeric section	applicable
8	Functions of the alphanumeric zone of the alphanumeric section	applicable

ISO/IEC 9995-3		
Clause		Applicability/Limitation
5	Common secondary group layout	applicable
6	Complementary Latin group layout	applicable

ISO/IEC 9995-4		
Clause		Applicability/Limitation
5-10		applicable, if present

ISO/IEC 9995-5		
Clause		Applicability/Limitation
5-12		only grouping of Cursor keys only as „Cross“ or „Inverte T“ Layout applicable

ISO/IEC 9995-7		
Clause		Applicability/Limitation
5	Descriptions of functions	Not to apply as used keys are not commonly used

ISO/IEC 9995-8		
Clause		Applicability/Limitation
5-6		applicable, if present

**Pen (DIN EN ISO 9241-410):**

Requirements according ISO 9241-410 Clause I.2.3.3 (**Grasp surface**), I.2.3.1 (**Size**) und I.2.3.2 (**Weight**) shall be fulfilled.

**Remark in the Users Manual and certificate**

„...nicht für permanente Bildschirmarbeit, nur für kurzzeitige Benutzung geeignet“  
 „...not for permanent video display work, suitable only for short time use“

**Annex 6: Data to be provided by the GS certificate (minimum)**

a) Notebook

<b>Identifier</b>	<b>Example</b>
1 Zertifikat-Nr. Certificate No.	123456789
2 Ausstellungsdatum Date of Issue	
3 Genehmigungsinhaber License Holder	Notebook GmbH
4 Fertigungsstätte Manufacturing Plant	Notebook Manufacturing GmbH
5 Abbildung des Prüfzeichens Figure of test mark	= GS-Zeichen der Prüfstelle
6 Prüfberichtsnummer Test Report No.	987654321
7 Prüfgrundlagen Test basis	EN 62368-1 EK1-ITB 2000
8 Zertifiziertes Produkt (Geräteidentifikation) Certified Product (Product identification)	Bezeichnung Type designation
9 Nennspannung/-frequenz Rated Voltage / Rated Frequency	Xvc V/u Hz
10 Nennstrom Rated Current	S A
11 Schutzklasse Protection Class	N
12 LCD-Display/Modul LCD Panel	Xyxxxx123
13 Pixelfehlerklasse Pixel Fault Class	P
14 Geeignet für maximale Beleuchtungsstärke nach EN 12464-1 Leuchtdichte von gerichtet reflektierten Lichtquellen (großflächige Lichtquelle (15°), kleinflächige Lichtquelle (1°)) Suitable for maximum illuminance according to EN 12464-1 Componente of illumination (large aperture soucre (15°), small aperture source (1°))	lx  cd/m², cd/m²
15 vorgesehener Sehabstand design viewing distance	ef
16 vorgesehene Sehrichtung und Sehrichtungsbereich design viewing direction and viewing direction range	°
Inhalt und Wahrnehmung Content and perception	
18 deklariertes Schalleistungspegel (L <sub>WAd</sub> ) bei Standby und voller Leistung Declared Sound Power Level (LWAd) in standby and full performance mode	Kl dB(A)
19 Gültigkeitsdauer des Zertifikates Certificate valid until	tt.mm.yyyy
20 Name des Zertifizierers Name of the person who does the certification	V. Certus
21 Unterschrift des Zertifizierers Signature of the person who does the certification	
22 Zertifizierungsstelle mit Angabe der Anschrift Certification Body inc. address	Cert GmbH, Certhausen
23 Hinweis, dass dem Zertifikat eine Prüf- und Zertifizierungsordnung zugrunde liegt. Hint, that the certificate is based on Testing and Certification Regulations.	
24 Feststellung, dass das Produkt die Anforderungen des ProdSG erfüllt. Statement, that the product meets the requirements of ProdSG.	

b) Flat Panel Display

<b>Identifier</b>	<b>Example</b>
1 Zertifikat-Nr. Certificate No.	123456789
2 Ausstellungsdatum Date of Issue	
3 Genehmigungsinhaber License Holder	Display GmbH
4 Fertigungsstätte Manufacturing Plant	Display Manufacturing GmbH
5 Abbildung des Prüfzeichens Figure of test mark	= GS-Zeichen der Prüfstelle
6 Prüfberichtsnummer Test Report No.	987654321
7 Prüfgrundlagen Test basis	EN 62368-1 EK1-ITB 2000
8 Zertifiziertes Produkt (Geräteidentifikation) Certified Product (Product identification)	Bezeichnung Type designation
9 Nennspannung/-frequenz Rated Voltage / Rated Frequency	Xvc V/u Hz
10 Nennstrom Rated Current	S A
11 Schutzklasse Protection Class	N
12 LCD-Display/Modul LCD Panel	Xyxxxx123
13 Pixelfehlerklasse Pixel Fault Class	P
14 Geeignet für maximale Beleuchtungsstärke nach EN 12464-1 Leuchtdichte von gerichtet reflektierten Lichtquellen (großflächige Lichtquelle 15°, kleinflächige Lichtquelle 1°) Suitable for maximum illuminance according to EN 12464-1 Componente of illumination (large aperture soucre (15°), small aperture source (1°))	lx  cd/m², cd/m²
15 vorgesehener Sehabstand Design viewing distance	ef
16 vorgesehene Sehrichtung und Sehrichtungsbereich Design viewing direction and viewing direction range	°
Inhalt und Wahrnehmung Content and perception	
19 Gültigkeitsdauer des Zertifikates Certificate valid until	tt.mm.yyyy
20 Name des Zertifizierers Name of the person who does the certification	V. Certus
21 Unterschrift des Zertifizierers Signature of the person who does the certification	
22 Zertifizierungsstelle mit Angabe der Anschrift Certification Body inc. Address	Cert GmbH, Certhausen
23 Hinweis, dass dem Zertifikat eine Prüf- und Zertifizierungsordnung zugrunde liegt. Hint, that the certificate is based on Testing and Certification Regulations.	
24 Feststellung, dass das Produkt die Anforderungen des ProdSG erfüllt. Statement, that the product meets the requirements of ProdSG.	

c) PC (Personal Computer)

<b>Identifier</b>	<b>Example</b>
1 Zertifikat-Nr. Certificate No.	123456789
2 Ausstellungsdatum Date of Issue	tt.mm.yyyy
3 Genehmigungsinhaber License Holder	PC GmbH
4 Fertigungsstätte Manufacturing Plant	PC Manufacturing GmbH
5 Abbildung des Prüfzeichens Figure of test mark	= GS-Zeichen der Prüfstelle
6 Prüfberichtsnummer Test Report No.	987654321
7 Prüfgrundlagen Test basis	EN 62368-1 EK1-ITB 2000
8 Zertifiziertes Produkt (Geräteidentifikation) Certified Product (Product identification)	Bezeichnung Type designation
9 Nennspannung/-frequenz Rated Voltage / Rated Frequency	Xvc V/u Hz
10 Nennstrom Rated Current	S A
11 Schutzklasse Protection Class	N
18 deklarierter Schalleistungspegel (L <sub>WAd</sub> ) bei Standby und voller Leistung Declared Sound Power Level (LWAd) in standby and full performance mode	Kl dB(A)
19 Gültigkeitsdauer des Zertifikates Certificate valid until	tt.mm.yyyy
20 Name des Zertifizierers Name of the person who does the certification	V. Certus
21 Unterschrift des Zertifizierers Signature of the person who does the certification	
22 Zertifizierungsstelle mit Angabe der Anschrift Certification Body inc. address	Cert GmbH, Certhausen
23 Hinweis, dass dem Zertifikat eine Prüf- und Zertifizierungsordnung zugrunde liegt. Hint, that the certificate is based on Testing and Certification Regulations.	
24 Feststellung, dass das Produkt die Anforderungen des ProdSG erfüllt. Statement, that the product meets the requirements of ProdSG.	

**Annex 7: Requirements for other devices**

**7.1 Remarks on electronic scales**

Electronic scales with indicators for the weighing of wares for use at cash registers and weighing work stations (i.e. as weighing or measuring instruments by employees of markets). The use/implementation usually takes place at stationary cash register and weighing work stations as well as at standing and sitting work stations

**7.2 Requirements**

Other devices with LCD indicators and display terminals must comply with the same requirements as those for flat panel displays. The actual context of use (environment, task, user) are to be taken into consideration. For technologies other than LCD, the analog equivalent standardized requirements apply.

Requirement	Standard / Referenz	Other devices (e.g. printer scanner, server, scales)
1 Image quality	DIN EN ISO 9241-3xx	X <sup>1)</sup>
2 Input requirements	DIN EN ISO 9241-410	X <sup>7) 8)</sup>
	DIN 2137	–
3 Sound power level L <sub>WAd</sub> (Operation according to manufacturer)	DIN EN ISO 7779 (ISO 9296) ArbStättV, annex 3.7	X <sup>3)</sup>
4 Tilt angle max. forward: Tilt angle min. backward:	ArbStättV, annex 6.3	≥ 5° <sup>4)</sup>
5 Swivel (rotation)	ArbStättV, annex 6.3	–
6 Max. force to swivel	ArbStättV, annex 6.3	–
7 Brightness adjustable	ArbStättV, annex 6.2	X <sup>5)</sup>
8 Contrast adjustable	ArbStättV, annex 6.2	X <sup>2)</sup>
9 Gloss of housing (Reflexion)	ArbStättV, annex 6.1 and annex 6.3 DIN EN ISO 9241-3xx	≤ 20 gloss units <sup>6)</sup>
10 Headphone output	DIN EN 50332	X <sup>2)</sup>
11 Technical documentation	ProdSG	X
12 Instructions for use	ProdSG	X

**Remarks:**

Requirements marked with an X must always be included

- 1) Analysis of the character attributes of the used character sets as well as the contrast of the given colour combinations and reflection.

	DIN EN ISO 9241-303	DIN EN ISO 9241-307	DIN EN ISO 9241-305
Analysis of the character attributes of the various character sets	5.5.4 Character height 5.5.6 Character stroke width 5.5.7 Character width-to-height ratio 5.5.9 Between-character spacing 5.5.10 Between-word spacing 5.5.11 Between-line spacing	Table 75  Viewing distance: - for handheld devices: minimum 300 mm - others: minimum 500 mm	P20.5 P20.7 P20.8 P20.12 P20.13 P20.14
Contrast of the colour combinations	5.5.2 Luminance contrast	Table 70 (measurement contrast under diffuse illumination 500 lx, contrast min. 3:1)	P18.2
Reflection	5.4.11 Unwanted reflections	Visual evaluation of the unwanted reflections: The reflection should be as small as possible. It should be possible to minimize unwanted reflections (e.g. by changing the position (angle) of the display).	

Single line displays and indicator displays will be excluded from the evaluation

2) if technically provided

3) With noise emitting parts

A plausibility check of the manufacturer data is necessary:

The test and the test report of the manufacturer containing the noise emission values have to be in accordance to the formal requirements of ISO 17025.

for server see A.2.9.25

4) This requirement is only valid for electronic scales

5) This requirement is only valid for ≥ DIN A5 (approx. 25.5 cm, 10 inch)

6) see A.2.9.31

7) Relating to other physical input devices (except keyboards), if technically provided

8) The following requirements of ISO 9241-410 are applied:

Keyboards:

- B.2.2.1.1 a) Keytop shape
- B.2.2.1.1 b) Strike surface (64 mm<sup>2</sup> for all keys)
- B.2.2.1.1 d) Force
- B.2.2.1.1 g) Bounce
- B.2.2.1.1 h) Key repeat function
- B.2.2.1.1 j) Geometric design of key legends
- B.2.2.1.1 m) Durability of legends
- B.2.3.1 f) Keyboard surfaces and material properties
- B.2.3.1 g) Numeric keypad
- B.2.3.1 l) Adjustability

Touch-sensitive screens:

- J.2.3.1 Orientation
- J.3 Documentation